

## HC-45 SMD



CROVEN CRYSTALS has provided high quality and reliability products to the frequency control industry for more than sixty years and is a world leader in the development and manufacture of the highest precision quartz resonators for demanding applications.


The HC-45 SMD series of crystal resonators provides a broad range of frequencies and designs in a rugged surface mountable enclosure.

### Features:

- SMD available in tape and reel
- cold weld sealed for **low aging** and **low phase noise** applications
- standard crystal types include AT, SC and IT-cut designs
- RoHS / REACH compliant

### Applications:

- precision OCXO, VCXO and TCXO oscillators
- military and other high reliability applications
- test and measurement and telecom equipment

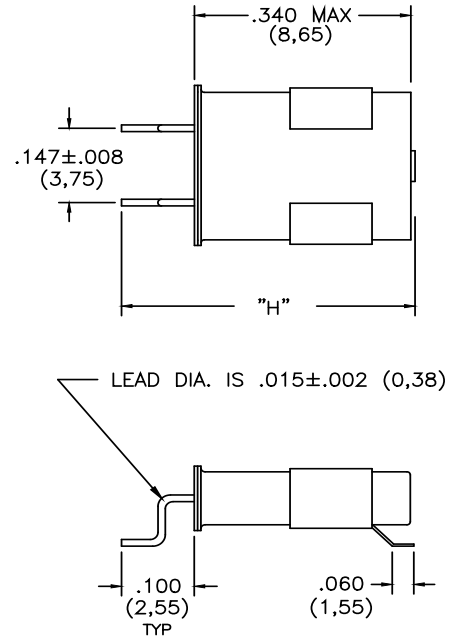

PARAMETER	Height 'H'	Mode	MINIMUM	MAXIMUM	UNITS
Resonant Frequency range @ specified load conditions and temperature	0.445" ± 0.020 11,30 ± 0,51mm	Fund	10	175	MHz
		3rd OT	18	225	
		5th OT	40	260	
		7th OT	80	260	
Operating Temperature Range			- 55	+ 125	° C

PARAMETER	STANDARD METHOD OBSERVED
Shock	MIL-STD-202 Method 213, Condition C - 100 g, 6 msec 1/2 sine
Vibration	MIL-STD-202 Method 204, Condition C, 10 g peak 55-2000 Hz
Solderability	MIL-STD-202 Method 208
Workmanship	per the general requirements of MIL-PRF-3098

### Notes:

- 1) Consult the factory for more detailed specifications or alternate requirements.